



How To Prolong The Life Of Your Boat Cover

- Avoid letting water or snow stand on the boat cover - use support poles, straps, or bows.
- Always tie boat cover down securely.
- Take the precaution of padding windshield, trolling motors, depth finders, etc. before installing boat cover.
- Clean boat cover regularly to remove salt, pollen and environmental pollutants that could support the growth of mildew. Brush off any loose dirt or soil, then spray the cover with a solution of mild, non-detergent soap (such as Lux, Dreft, Ivory or Woolite) and cool/warm water. A soft brush may be used on heavily soiled areas. Rinse thoroughly. If cleaning deminishes the water repellency of the cover, we recommend treating with 303 High Tech Fabric Guard™ Water Repellent.
- Allow boat cover to dry thoroughly before folding for storage.

Warranty

Styled to Fit Covers warranty ranges 3 to 5 Years and is determined by the fabric that you select.

Please refer to full Warranty details on the product page for Styled to Fit Boat Covers

Further Information

If you require details about the Styled to Fit Boat Covers please contact us.

Our contact details are 07 5493 1400 or send email to :
boatcovers@coverworld.com.au



Installing A Carver Boat Cover

⚠ Please take extra care when trying your boat cover on for the first time! Should you need to return the boat cover, it **MUST** be in its original, new condition.


The cover must be clean and free of debris (including pet hair). Soiled, wet, mildewed, torn or otherwise mishandled covers cannot be accepted for exchange or credit.



The cover must be clean and free of

debris (including pet hair). Soiled, wet, mildewed, torn or otherwise mishandled covers cannot be accepted for exchange or credit.

All Carver Boat Covers are rolled and packaged with the bow end of the cover to the outside. The tag on the bow end is sewn into the **inside** hem of the cover. To cover your boat, proceed as follows:

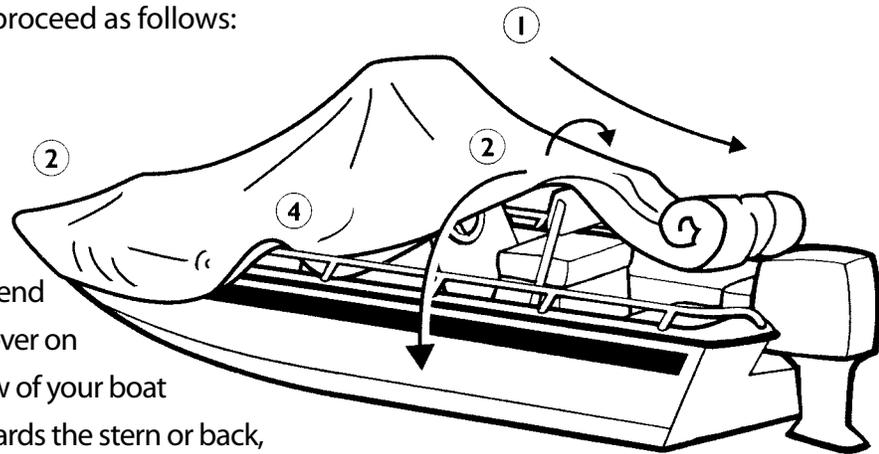

1. Place the bow end of the rolled cover on or near the bow of your boat and unroll towards the stern or back, positioning it down the center of the boat as you unroll.
2. Slip the front of the cover over the bow and pull the cover open to the sides as you work towards the back of the boat.
3. If using support poles (optional for most covers), position the poles under your cover prior to completely covering the boat. Also add any padding needed for the windshields, trolling motors, depth finders, etc.
4. Adjust cover fit by pulling cover tight to eliminate sagging areas. These areas may collect standing water or snow and shorten the life of your cover.
5. Using the reinforced tie-down loops, secure the cover to your trailer. **When trailering, always use heavy-duty tie-downs, sold separately.**
6. Remove the boat cover by folding to the center from both sides and rolling the cover from back to front. This will make it easier to repeat steps 1 thru 5 when covering your boat again. **(Important: Allow the cover to dry thoroughly before folding for storage.)**