



CUSTOM MADE SEAT COVERS

CONTENTS

- 1) Custom Made Seat Covers Form
- 2) Example of Seat Diagrams to help complete the Custom Made Seat Covers Form
- 3) Seat Covers FAQ
- 4) Seat Cover Fitting Instructions

For assistance please call 1300 734 759
www.coverworld.com.au

ORDER DETAILS

Date of Order:
 Order Number:
 * Order number is on your email confirmation
 Contact Name:
 Telephone Number: (.....).....

VEHICLE DETAILS

Make: EG: FORD
 Model: EG: FALCON
 Class/Series: EG: FG XR6
 Month/Year: EG: 02/2010
 Body Type: EG: SEDAN

FRONT SEATS

(Tick what's applicable)

- BUCKET SEATS
 FULL WIDTH BENCH
 BUCKET & ¾ BENCH
 CENTREFOLD BENCH
 GEARSTICK CUT OUT
 S L
- REAR MAP POCKET CUT OUT
 (SLIT TO USE EXISTING MAP POCKET)
 HEADRESTS REQ 2 H/R 3 H/R
 → ADJUSTABLE MOULDED
 ARMREST REQUIRED YES NO
 DEPLOY SAFE AIRBAGS YES NO

CUSTOM
FIT BOOK
PICTURE

OFFICE USE

COMMENTS or DIAGRAM

MIDDLE SEATS

(Tick what's applicable)

- Driver/PassengeDriver/Passenger
 BACKREST 50/50 60/40 40/60 40/20/40 FULL BENCH
 BASE 50/50 60/40 40/60 40/20/40 FULL BENCH
 HEADRESTS NO 2 H/R 3 H/R → ADJUSTABLE
 MOULDED
 SIDE BOLSTERS ON BACK YES NO
 ARMREST REQUIRED YES NO
 BOOT ACCESS REQUIRED YES NO
 DEPLOY SAFE AIRBAGS YES NO

CUSTOM
FIT BOOK
PICTURE

OFFICE USE

COMMENTS or DIAGRAM

REAR SEATS

(Tick what's applicable)

- Driver/PassengeDriver/Passenger
 BACKREST 50/50 60/40 40/60 40/20/40 FULL BENCH
 BASE 50/50 60/40 40/60 40/20/40 FULL BENCH
 HEADRESTS NO 2 H/R 3 H/R → ADJUSTABLE
 MOULDED
 SIDE BOLSTERS ON BACK YES NO
 ARMREST REQUIRED YES NO
 BOOT ACCESS REQUIRED YES NO
 DEPLOY SAFE AIRBAGS YES NO

CUSTOM
FIT BOOK
PICTURE

OFFICE USE

COMMENTS or DIAGRAM

ALL CUSTOM MADE SEAT COVERS COME WITH FABRIC TIES

Custom Fit Seat Covers Are **Non-Returnable**. Refer to the **FAQ** It is essential that all the above information is completed. Orders will not be processed unless all correct relevant information is provided on this form, please read **FAQ** and **Instructions**

Coverworld
Ofce Use

PO NUMBER

SERVICE


MATERIAL SELECTION

COLOUR


DELIVERY DETAILS

Identify your Style of Seat


The images below show the most popular style of Seats in Vehicles. if you have a different style of seat you can describe it or take a photo




Bucket Seats



Bucket & 3/4 Bench




Centrefold Bench

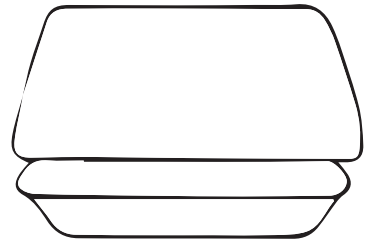

Full Bench

Identify your Headrest Type

There are two common styles of Headrest. Adjustable and Integrated. Adjustable Headrests can be moved, Integrated are built into the seat

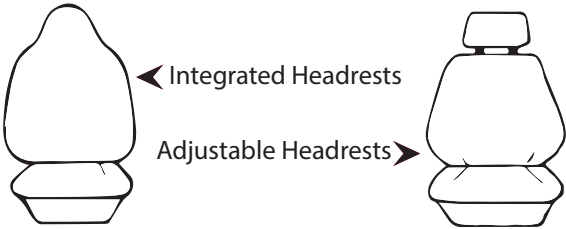

Integrated Side Airbags

If you have integrated side airbags then the seat covers will be made airbag compatible.



Sports Seats & Side Bolsters:





Sports style front seats can have contoured edges.



Rear seats can have side bolsters


Identify your Seat split

Looking into the vehicle from the front determines the Split Ratio

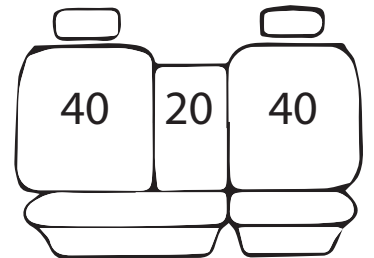


Gearstick Cut Outs

Looking into the vehicle from the front determines the Split Ratio



Small Cut Out



Small Cut Out

Vehicle Month and Date of Manufacture

If you are not sure of the month and year please check your car

Vehicle Series

The specific series of your vehicle can make a big difference to the type / design seats that are installed, they change from model to model so please check this.

If you need any further assistance please contact Coverworld for assistance. Please complete pages 2 and 3 as below

Car Seat Covers FAQ

How does "Deploy Safe" work?

Deploy Safe seat covers are constructed using a computerised controlled stitching process and a specialised thread that allows the side seams to split open upon deployment of an airbag.

For more information please refer to our Deploy Safe section on this website.

Have Deploy Safe seat covers been tested? Are the seat covers guaranteed to deploy?

Yes, Deploy Safe has been tested by a world wide recognised automobile testing laboratory that is headquartered in Australia and Europe. Deploy Safe products have passed all their tests.

After extensively testing this new technology, the manufacturer fully confident in its operation according to world standards. Quality and safety issues are very important to Coverworld and the manufacturer.

Have Deploy Safe seat covers been tested on a car like mine?

The testing was done on a "test group" that took into account different seat sizes, different mechanisms of integrated side airbags and different external factors such as weather, temperature etc. Deploy Safe was tested on an integrated side airbag mechanism very similar to the one in your car seat.

My car dealer tells me not to put seat covers on my car as they may interfere with side airbag deployment, what should I do?

The covers have been tested these seat covers under special laboratory conditions and have been tested to conform within vehicle manufacturers standards for integrated side airbag deployment.

Deploy Safe seat covers provide no interference with the time required for deployment of side airbags according to vehicle manufacturers requirements. Deploy Safe seat covers are safe to use with integrated side airbags as long as they are fitted correctly.

How long is the Deploy Safe guarantee valid?

The same time of guarantee of the operation for its Deploy Safe seat covers as on its normal range of seat covers being from 1 to 5 years depending on the seat cover product. Please check your packaging for guarantee details.

Will tampering with side seams void the warranty?

Yes, if the side seam splits for any reason it **CANNOT** be repaired. Any attempt to re-sew the seam may interfere with the integrated side airbag deployment. Discard the seat cover after any side airbag activation. Incorrect fitting can prevent the seat airbag from inflating correctly in the event of a collision.

How do you keep track of time/usage?

Customers are asked to fill in a purchase registration form with details of their purchase and send it back to Coverworld. The purchase registration form is included in every pack of Deploy Safe seat covers.

The purchase registration records your integrated side airbag compatible seat covers. Your registration will be saved together with the production information of your individual seat covers. This data will be treated with the strictest confidence and we will keep them on file for up to 5 years.

Car Seat Covers FAQ - Page 2

Do I need to fill out the Deploy Safe purchase registration form and send it back to Coverworld?

No, the purchase registration form is not mandatory nor will it void any warranties. You do not have to fill it out and send it back to Coverworld or the Manufacturer

The Purchase Registration records that you have been using integrated side airbag compatible seat covers. The information is useful for you and for our records.

Should I be concerned about fitting Deploy Safe seat covers on the correct side of the seat?

A universal size 25 Deploy Safe, 30 Deploy Safe and Tailor Made Deploy Safe packs have universal opening seams on BOTH sides of each seat cover. Each seat cover can be fitted on either driver or passenger seats.

However, Custom Made seat covers have universal opening seams on either left and/or right hand side of the seat cover only. Thus fitting can only be done according to the predetermined sides.

Can I order Deploy Safe custom made seat covers in any fabric or sheepskin?

Yes, all our fabrics and sheepskin can be custom made using Deploy Safe Technology.

Is a universal size 25/60 available in the Deploy Safe range?

Yes, in 2014 we gradually started introducing size 25/60 in Deploy Safe across our fabric and sheepskin range. Please contact our customer service department to determine if it is available in the fabric or sheepskin you require.

My car does not seem to be in your Tailor Made range. Can you make an Esteem or Outback Tailor Made Pack for my car?

No, the Esteem and Outback Tailor Made packs are manufactured overseas. Alternatively, we can custom make seat covers in Esteem or Outback for your vehicle, but as they are custom made in Australia they are charged at a different price. Please contact your nearest retailer to find out pricing.

Can I purchase an Esteem or Outback Tailor Made pack in another fabric style?

You can, however it will be a custom made order. Our Tailor Made packs are only available in their designated material and colour. If you want seat covers to suit your vehicle in another material or colour then it would need to be custom made.

I want to buy a Tailor Made pack but I don't need the rear seat cover. Can I just buy the front seat covers?

The Tailor Made range of Esteem and Outback Canvas seat covers come in packs as sets of front/rear or front/middle/rear (depending on the car configuration) and unfortunately cannot be separated.

My car is brand new. Do you have a Tailor Made pack available for it yet?

Tailor Made packs are mass produced and as such we are always looking to release packs for the most popular makes and models available for sale in Australia. Unfortunately, as there are many makes and models of cars released in Australia each year, we are unable to release a Tailor Made pack for each and every model. Tailor Made packs are available for the most common vehicles.

Car Seat Covers FAQ - Page 3

I'm looking at a picture of an earlier model of my car in your Tailor Made packs range, and I'm sure that the seats look the same as the ones in my latest model. Can I buy the Tailor Made pack for the earlier model and use it in my car?

Often when vehicle manufacturers upgrade models of vehicles the seats look quite similar to the previous model, but there can be slight changes to the dimensions of the seats, positioning of seat belts, positioning of headrests and armrests, etc.

So, while the seats may look similar our Tailor Made seat cover packs have been tailor made to suit the model listed on the packaging only.

I need my seat covers urgently. How long will they take to be Custom Made?

Once we confirm we have the pattern and all the correct details for your vehicle, allow up to 10 working days for the seat covers to be manufactured.

If you need them in a hurry, we also have an Express Service for an additional cost, whereby the seat covers are made within 5 working days.

How can I be sure that the Custom Made seat covers that I buy will fit my car perfectly?

By providing us with all the correct details such as the car make, model, month and year of manufacture and seat configuration of your vehicle we are able to correctly choose the right pattern for the seat covers to suit your vehicle. The more accurate information we have about your vehicle ensures that your seat covers will be manufactured for a perfect fit.

What happens if the custom made seat covers don't fit?

It is very infrequent to find a manufacturing defect with your custom made seat covers. If there is a manufacturing defect then the error will be rectified with a replacement part or repair. A manufacturing defect is not considered a major fault and does not mean that the seat covers can be returned for a full refund. Note it is very uncommon to find manufacturing defects in your custom made seat covers.

My car is very old. Can you make car seat covers for my car?

Seat cover measurements and detailed patterns are available for most Australian vehicles dating back to 1967. Providing we have the measurements for your vehicle, we are able to Custom Make seat covers to suit your car.

How do I know if I need a universal or custom made seat cover for my car?

Universal size front or rear car seat covers are made to fit the majority of vehicles available in Australia today. Our universal seat covers are designed with price in mind for a quick fit option. Rear seats in today's late model vehicles are becoming increasingly complex, with split fold backrests, armrest, and cup holders.

If you are after a perfect fit, we recommend our Custom Made service, where we can custom make seat covers to suit your vehicle.

What's the difference between Custom Made to order Seat Covers and Tailor Made Packs of Seat Covers?

Ready Made Packs have been mass produced to suit the most popular vehicles, but have been pre-made offshore. They are available "off the shelf" today. Custom Made to Order are made in Australia for your vehicle

Car Seat Covers FAQ - Page 4

Will a universal size 25 or 30 fit my front seats?

Universal size may fit your car depending on your front seats. However it will not fit as well as a custom made.

Can I wash or dry clean my seat covers?

Yes, simply follow the washing instructions which can be found on the labels inside the seat covers, on the packagin

Washing Guide : Fabric Seat Covers

Wash separately on gentle cold cycle. Do not soak, bleach, wring or spin. Do not dry clean, do not iron.

Sheepskin Seat Covers

Hand wash with approved wool detergents. Do not soak for prolonged periods. Rinse and gentle spin (fleece out). Dry naturally at room temperature away from direct heat, preferably flat in shaded area. While still damp gently pull into shape and brush with a course stiff brush to restore pile. Do not iron. Specialist dry-cleaning recommended.

How do I resolve warranty issues?

Any problems with workmanship, wear & tear and fitting should be presented to our address on the Sunshine Coast or via photos. If you are unable to provide photos or come to our business address on the Sunshine Coast then the seat covers will need to be retruend for inspection and evaluation. We will then contact the Manufacturer about any warranty issues.

Further Deploy Safe Information : The secrets to the Deploy Safe airbag safe seat covers are:

Proven Technology

Deploy Safe uses a special stitching technique which is designed to allow the seat cover side seams to break open upon deployment of an airbag. This is similar technology used by vehicle manufacturers in their integrated seat airbags.

Overall Stitching

The Deploy Safe stitching is used on both side seams of all universal size 25 and 30 Deploy Safe seat covers. Integrated side airbags will always deploy regardless of where and how the integrated side airbag and any seat covers are fitted.

Specialised Computerised Sewing Machines

Specialised fully computerised sewing machines are used to manufacture all Deploy Safe seat covers.

Manufacturing Standards

The highest manufacturing standards are used and strictly controlled including the thread thickness, strength, length and tension of each stitch.

Quality Assurance

Only if all the Deploy Safe strict manufacturing quality parameters are passed will the stitching machine produce a unique verification barcode and number that records the exact date and time of manufacture.

Quality Control Barcodes

Two individual quality control verification barcode stickers are sewn into the left and right side seams of each each universal size 25 and 30 Deploy Safe seat covers and Tailor Made Esteem and Outback Deploy Safe packs and only on the driver and passenger side respectively for custom made Deploy Safe seat covers to verify that it has passed the strict quality control standards. Duplicates of the quality control verification barcode stickers are also provided and sewn into the seat cover for Purchase Registration purposes.

SAFETY INFORMATION FOR VEHICLES WITH INTEGRATED SIDE AIRBAGS:

Correct initial fitting and securing of Deploy Safe seat cover on the vehicle is essential to guarantee the safety of the user.

Incorrect fitting can prevent the seat airbag from inflating correctly in the event of a collision.

When fitting Deploy Safe seat cover proceed as follows:

* Seat covers have Deploy Safe seams on both left and right hand side of each seat cover to permit fitting on either front seat.

* Driver and passenger seats must be mounted in the correct positions.

Seat covers that have slipped must be repositioned. If this is no longer possible because of advanced wear the cover must be removed and replaced.

* Do not tamper with the opening side seam of the seat cover.

* Regularly inspect seat covers for wear, damage and seat cover misalignment.

* Adjust alignment if seat cover twists or moves from its original central aligned position.

* If the side seam splits for any reason it CANNOT be repaired. Any attempt to re-sew the seam may interfere with the integrated side airbag deployment.


* Discard seat cover after side airbag activation.

*** Airbag deployment must never be compromised by the incorrect fitting of car seat covers.**

Deploy Safe Seat covers are designed to allow the side seams to split open upon deployment of an airbag as they are constructed using a computer controlled stitching process and a specialised thread.

Deploy Safe seat covers are suitable for vehicles with or without integrated side airbags.


WARNING: Do not fit seat covers without side airbag allowance to seats with integrated side airbags.

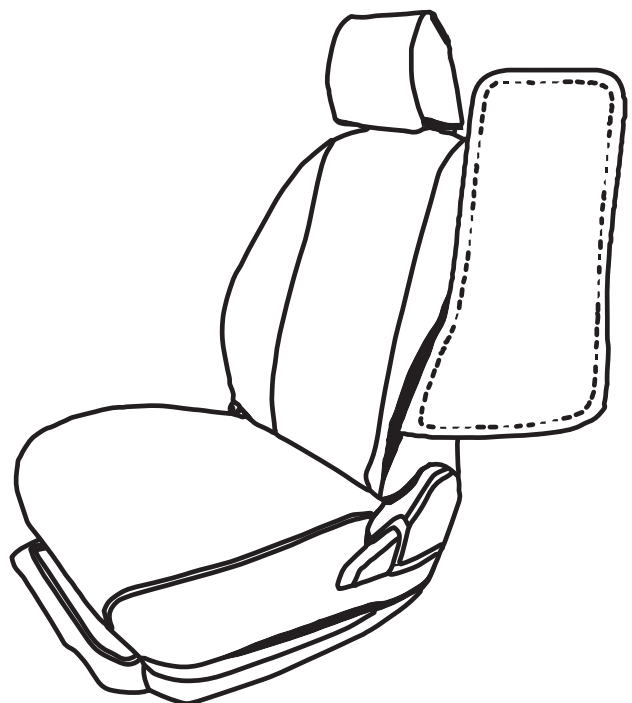

Fitting Instructions for Universal Front Seat Covers

For size 25/60 seat covers (seats with an integrated or non-adjustable headrest)

1. Lace the seat cover over the back of the seat and pull down firmly, straightening the cover for a tight snug fit.
2. Push the centre straps through between the seat base and backrest so they can be tied underneath the seat.
3. Pull the base cover over the base of the seat and straighten to ensure a neat, snug fit.
4. Run the straps on the outside of the seat cover base and tuck in behind the plastic side cover of the seat and bring it under the seat just above the seat rail.
5. The seat cover is held in place by the straps. Fasten all straps to each other or to the underside of the seat.



For size 30/50 seat covers (seats with a separate/adjustable headrest)

1. Remove the headrest from the seat completely. Some headrests have a button located under the headrest. Push the button in and pull the headrest upwards to remove it. Other vehicles will have a pin that needs to be pushed out to allow the headrest to be removed.
2. Fit the headrest cover over the headrest and fasten the velcro straps together. Do not refit the headrest to the seat just yet, keep on the side.
3. Place the seat cover over the back of the seat and pull down firmly, straightening the cover for a tight snug fit.
4. Push the centre straps through between the seat base and backrest so they can be tied underneath the seat. Where there is carpet on the back of the seat restricting access through the seat, push the ties through the corner of the seat back and base.
5. Pull the base cover over the base of the seat and straighten to ensure a neat, snug fit.
6. Run the straps on the outside of the seat cover base and tuck in behind the plastic side cover of the seat and bring it under the seat just above the seat rail.
7. The seat cover is held in place by the straps. Fasten all straps to each other or to the underside of the seat.
8. Once the seat cover is fitted correctly, refit the headrest to the seat and push down so that the headrest retracts to its original position.








Fitting Instructions for Universal Rear Seat Covers

For size 06/08 seat covers

1. Remove the base of the rear seat by pulling upwards. Some pressure may be required. A clip under the seat on each side should release. The base can then be removed.
2. Remove the backrest part of the seat by applying upward pressure from the bottom of the backrest and the seat will slide upwards, releasing itself from the clips that hold the backrest in place. The entire backrest will now be able to be removed.
3. Fit the seat cover base to the base of the seat and fasten all straps together for a tight fit.
4. Fit the seat cover backrest to the backrest of the seat and fasten all straps together for a tight fit.
5. Refit the backrest into the vehicle. There should be two hooks protruding from behind where the backrest is to be positioned. Once the backrest is in place apply pressure from the top of the seat in a downwards motion. The backrest will now be secured by the hooks and should hold firmly in place.
6. Refit the base of the seat into the vehicle. Once in place apply pressure to the forward part of the seat base so that it clips back into position. Some pressure may be required.



For size 06H/08H seat covers

1. Remove any headrests from the rear seat. Some headrests have a button located under the headrest. Push the button in and pull the headrest upwards to remove completely. Other vehicles will have a pin that needs to be pushed out to allow the headrest to be removed.
 2. Fit the headrest cover over the headrest and fasten the velcro straps together. Do not refit the headrest to the seat just yet, keep on the side.
 3. Remove the base of the rear seat by pulling upwards. Some pressure may be required. A clip under the seat on each side should release. The base can then be removed.
 4. Remove the backrest part of the seat by applying upward pressure from the bottom of the backrest and the seat will slide upwards, releasing itself from the clips that hold the backrest in place. The entire backrest will now be able to be removed.
 5. Fit the seat cover base to the base of the seat and fasten all straps together for a tight fit. Fit the seat cover backrest to the backrest of the seat and fasten all straps together for a tight fit.
 5. Refit the backrest into the vehicle. There should be two hooks protruding from behind where the backrest is to be positioned. Once the backrest is in place apply pressure from the top of the seat in a downwards motion. The backrest will now be secured by the hooks and should hold firmly in place.
 6. Refit the base of the seat into the vehicle. Once in place apply pressure to the forward part of the seat base so that it clips back into position. Some pressure may be required.
- Once the back seat is firmly secured refit the headrests into position and push the headrests down to their full downward position.

WARNING: These seat covers are not suitable for vehicles where airbags are contained within the seat. Do not fit seat covers without side airbag allowance to seats with integrated side airbags.

Fitting Instructions Custom Made Front Seat Covers

Fitting Instructions for Custom Made Front Bucket Seats

1. Place the seat cover over the back of the seat and pull down firmly, straightening the cover for a tight snug fit.
2. Remove the headrest from the seat completely. Some headrests have a button located under the headrest. Push the button in and pull the headrest upwards to remove it. Other vehicles will have a pin that needs to be pushed out to allow the headrest to be removed. Fit the headrest cover over the headrest and fasten the fabric ties together. Do not refit the headrest to the seat just yet, keep on the side.
3. Place the seat cover over the back of the seat and pull down firmly, straightening the cover for a tight snug fit. If your seat has any armrest, feed the armrest through the cutout provided on the seat cover.
4. Push the centre ties through between the seat base and backrest so they can be tied underneath the seat. Where there is carpet on the back of the seat restricting access through the seat, push the ties through the corner of the seat back and base.
5. Pull the base cover over the base of the seat and straighten to ensure a neat, snug fit.
6. Run the ties on the outside of the seat cover base and tuck in behind the plastic side cover of the seat and bring it under the seat just above the seat rail.
7. The seat cover is held in place by the ties. Fasten all ties to each other. Once the seat cover is fitted correctly, refit the headrest (if applicable) to the seat and push down so that the headrest retracts to its original position. If your seat has any armrest, place cover over armrest and fasten ties




It is essential to read the Airbag Information before installing seat covers to seats with Integrated Side Airbags

IMPORTANT : READ AIRBAG INFORMATION

Fitting Instructions Custom Made Middle Seat Covers

Fitting Instructions for Custom Made Middle Seat

1. Remove the headrest (if applicable) from the seat completely. Some headrests have a button located under the headrest. Push the button in and pull the headrest upwards to remove it. Other vehicles will have a pin that needs to be pushed out to allow the headrest to be removed.
2. Fit the headrest cover over the headrest and tie the ties together. Do not refit the headrest to the seat just yet, keep on the side.
3. For the backrest, tilt any split section forward to enable the seat cover to be fitted to the backrest part of the seat.
4. If no split section is present, tilt the entire backrest forward to enable easy fitting of the seat cover.
5. Fit the seat cover over the back of the seat and pull down firmly, straightening the cover for a tight snug fit.
6. Push the centre ties through between the seat cushion at the base of the seat back, so they can be tied on the other side. Where there is carpet on the back of the seat restricting access through the seat, push the ties through the corner of the seat back and base.
7. Tie up all the ties under the seat backrest while the seat is tilted forward.

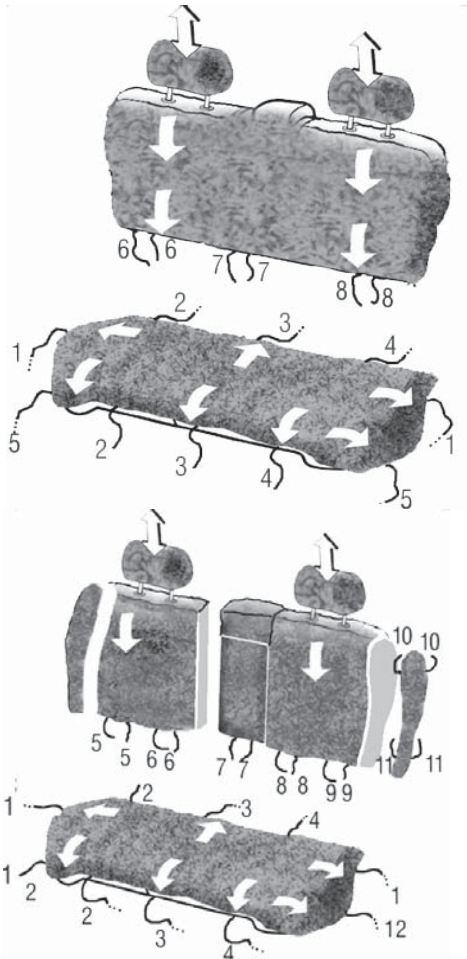

8. Put the seat cover base over the base of the seat. Straighten to ensure a neat, snug fit.
9. Run the ties on the outside of the seat cover base, positioning the ties so that they can be tied up under the seat base from the sides and from front to back.
10. Once all ties are securely tied, fold the seat backrest back to its original position. If your vehicle has a centre armrest/centre console, fit the armrest cover over the armrest and tie the ties together.
11. Once the seat cover is fitted correctly, refit the headrests (if applicable) into position and push the headrests down to their full downward position.

WARNING: These seat covers are not suitable for vehicles where airbags are contained within the seat unless the seat covers have been specifically tailored for the vehicle using Deploy Safe technology. Do not fit seat covers without side airbag allowance to seats with

IMPORTANT : READ AIRBAG INFORMATION

Fitting Instructions Custom Made Rear or 3rd Row

Fitting Instructions for Custom Made Rear Seat or 3rd Row

1. Remove the headrest (if applicable) from the seat completely. Some headrests have a button located under the headrest. Push the button in and pull the headrest upwards to remove it. Other vehicles will have a pin that needs to be pushed out to allow the headrest to be removed.

2. Fit the headrest cover over the headrest and tie the ties together. Do not refit the headrest to the seat just yet, keep on the side.

3. For the backrest, tilt any split section forward to enable the seat cover to be fitted to the backrest part of the seat.

4. If no split section is present, tilt the entire backrest forward to enable easy fitting of the seat cover.

5. Fit the seat cover over the back of the seat and pull down firmly, straightening the cover for a tight snug fit.

6. Push the centre ties through between the seat cushion at the base of the seat back, so they can be tied on the other side. Where there is carpet on the back of the seat restricting access through the seat, push the ties through the corner of the seat back and base.

7. Tie up all the ties under the seat backrest while the seat is tilted forward.

8. Put the seat cover base over the base of the seat. Straighten to ensure a neat, snug fit.


9. Run the ties on the outside of the seat cover base, positioning the ties so that they can be tied up under the seat base from the sides and from front to back.

10. Once all ties are securely tied, fold the seat backrest back to its original position.

If your vehicle has a centre armrest/centre console, fit the armrest cover over the armrest and tie the ties together.

11. Once the seat cover is fitted correctly, refit the headrests (if applicable) into position and push the headrests down to their full downward position.

WARNING: These seat covers are not suitable for vehicles where airbags are contained within the seat unless the seat covers have been specifically tailored for the vehicle using Deploy Safe technology. Do not fit seat covers without side airbag allowance to seats with integrated side airbags. - READ AIRBAG INFORMATION

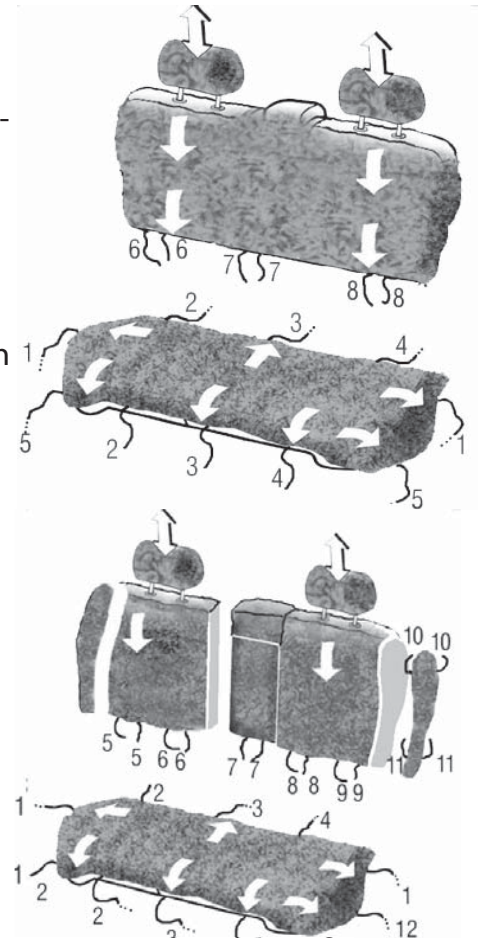

Note: Some rear seat or 3rd rows can be completely removed from a vehicle by removing the base of the rear seat by pulling upwards. Some pressure may be required. A clip under the seat on each side should release. The base can then be removed. Remove the backrest part of the seat by applying upward pressure from the bottom of the backrest and the seat will slide upwards, releasing itself from the clips that hold the backrest in place. The entire backrest will now be able to be removed.